



Series DT220

OR Valve (Shuttle Valve)

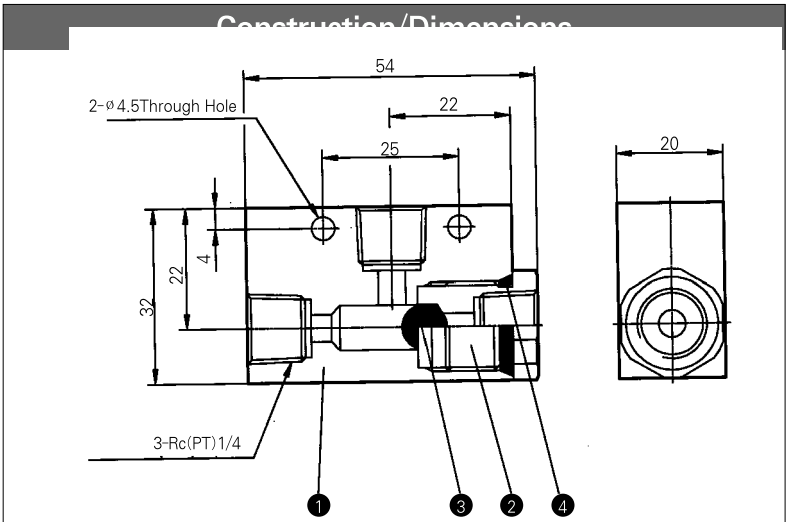

- 3 ported check valve with one output and 2 pneumatic signal input ports.
- Output always supplied by high pressure inlet



Model/Specifications	
Model	DT 220-02
Port Size	Pc(PT) 1/4
Max. Operating Pressure	9.9 kgf/cm ²
Min. Pressure Differential	0.5 kgf/cm ²
Ambient and Fluid Temperature	0~60
Effective Area (Cv)	19mm ² (1.0)

Component Parts

No.	Description	Material	Notes
①	Body	Aluminum Alloy	
②	Bush	Brass	
③	Ball	N.B.R	
④	Gasket	N.B.R	

DW
DS
DV
DX2
DP
DM
DH
DT
DC