


引導止逆閥 Pilot Operated Check Valves

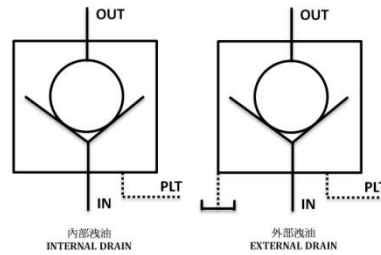

規格說明 SPECIFICATIONS

型式 MODLE		最高使用壓力 MAX. OPERATED PRESSURE (bar)	啟流壓力 CRACKING PRESSURE (bar)	最大流量 MAX. FLOW (l/min)	重量 WEIGHT (kg)	
PCV-03G	PCV-03T	210	50 : 5	75	4.2	
PCV-04T					3.7	
PCV-06G	PCV-06T			125	7	6.3
PCV-10G	PCV-10T			320	11	12

附屬品 ATTACHMENT

型式 MODLE	安裝螺絲 SOC HOL CAP SCREW
PCV-03G	M10 X 55L.....4pcs
PCV-06G	M10 X 65L.....4pcs
PCV-10G	M10 X 80L.....4pcs

型號說明 HOW TO ORDER

PCV - 03 G - 50

啟流壓力 CRACKING PRESSURE
50 : 5 bar

接續型式 TYPE OF CONNECTION
G : 座墊型 SUB-PLATED TYPE
T : 配管型 THREAD TYPE

閥口徑 VALVE SIZE
03 : 3/8" 04 : 1/2"
06 : 3/4" 10 : 1-1/4"

系列編號 SERIES NUMBER