

600 Series Swivel Line



• Operating Condition


- Size Range : 50A~150A (2"~6")
- Max. Pressure : 210kgf/cm² (3,000PSI)
- Max. Temperature : 100°C (210°F) NBR Packing
180°C (360°F) Viton Packing
- Media : Air, Oil, Water, Hydraulic Oil

• Features

- Pressure Balance Type
- Low Torque at High pressure
- Extended service life

• Series KJ600은 압력밸런스 타입으로 고압에서 낮은 Torque와 제품의 긴 수명이 특징입니다.

KJ600

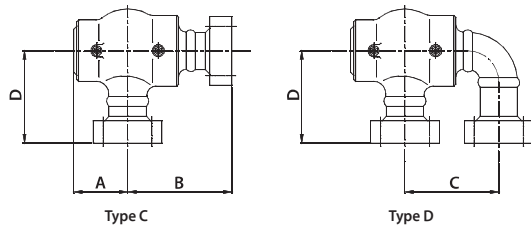

Nominal Size		A	B	C	D	Weight(kg)	
						Type C	Type D
50A	2"	88	200	153	136	33.0	34.0
65A	2-1/2"	103	220	184	166	48.0	49.5
80A	3"	109	240	207	173	57.0	60.0
100A	4"	141	270	274	206	87.0	92.5
125A	5"	155	310	324	295	159.0	169.0
150A	6"	195	450	400	370	240.0	256.0

[unit : mm]

610 Series Swivel Joints



• Operating Condition


- Size Range : 8A~50A (1/4"~2")
- Max. Pressure : 210kgf/cm² (3,000PSI)
- Max. Temperature : 100°C (210°F) NBR Packing
180°C (360°F) Viton Packing
- Media : Air, Oil, Water, Hydraulic Oil

• Features

- Pressure Balance Type
- Low Torque at High Pressure
- Extended service life

• Series KJ610은 압력밸런스 타입으로 고압에서 낮은 Torque와 제품의 긴 수명이 특징입니다.

KJ610

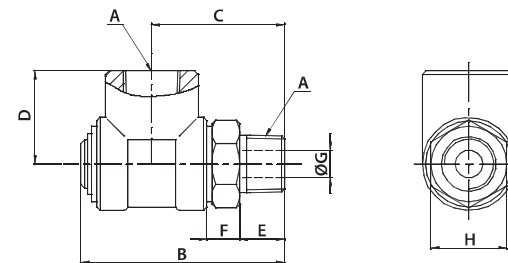

Nominal Size	A (PT)	B	C	D	E	F	G	H	Weight(kg)
									Type C
8A	1/4"	54.5	36	23	12	9.5	6	19	0.1
10A	3/8"	59	38.5	27	13	9.5	8	22	0.2
15A	1/2"	74.5	49.5	29	17	13	12	27	0.4
20A	3/4"	91	60	34	20	14.5	16	30	0.5
25A	1"	106	71	38.5	23	19	20	41	0.9
32A	1-1/4"	121	79	44	25	20	28	50	1.4
40A	1-1/2"	132	86	54	25	23	34	60	2.0
50A	2"	161	104	60	30	26	42	70	3.1

[unit : mm]