


Auto Switch Specifications

Auto Switch Model	W3		
Application	Relay, Sequence Control		
Load Voltage	DC24V	AC100V	AC200V
Max. Load Current / Range of Load Current	5~50mA	5~25mA	5~12.5mA
Protection Circuit Contact Breaker Point	Built-in		
Internal Voltage Drop	2.4V		
Indicator Light	ON:Red Light Emitting Diode		




- Leakage current - None
 - Response time - 1.2ms
 - Lead Wire - Oil proof vinyl. $\phi 4$, (0.3)mm², 2 wire(red, black), 0.5m
 - Impact Resistance - 30G
 - Insulation Resistance - 50M Ω or more under the test voltage 500VDC (Between case and cable)
 - Withstand Voltage - 1500VAC 1min(between case and cable)
 - Ambient Temperature - -10~60℃
 - Protection Structure - IEC spec IP67, Water-proof(JISCO920), oil-proof.
- ※ If 3m lead wire is required, L is put at end of model numbers.
(Example) W3L

Auto Switch/Internal Circuit

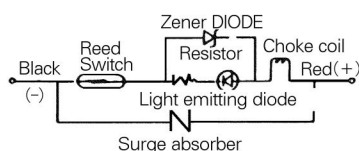

Auto Switch Dimensions

(mm)

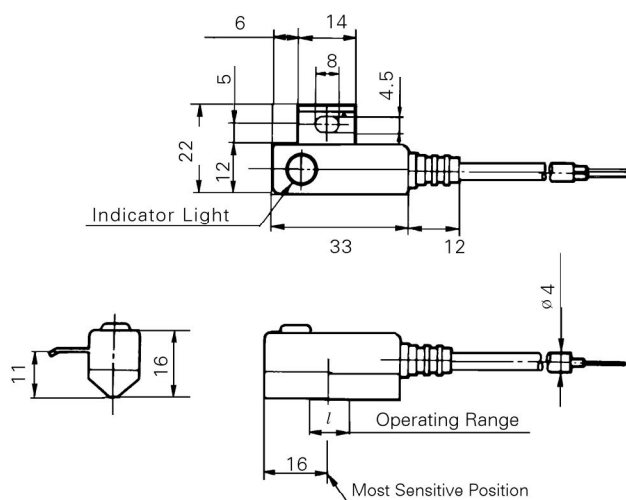

Operating Range (/ Dimensions)

(mm)

Series	Bore Size(mm)				
	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$
AM	9	10	11	11	11

ACP

AX

AS

AM

AM2

AL
ALX

ARD

AJ

AQ

AG

AGX
GX

ADM

ADR

AMR

AST

NLCD